



P.B.5818 - Patentlaan 2  
2280 HV Rijswijk (ZH)  
☎ (070) 3 40 20 40  
FAX (070) 3 40 30 16

Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

Generaldirektion 1

Directorate General 1

Direction générale 1

WIPO  
The International Bureau  
34, Chemin des Colombettes  
CH-1211 GENEVA 20  
SWITZERLAND



EPO Customer Services

Tel.: +31 (0)70 340 45 00

Date

11-07-2005

Reference P38874EP-K/MNM	Application No./Patent No. 03769075.7 - 2214 PCT/AU0301469
Applicant/Proprietor Ramsay, George Stephen	

For the aforementioned application, you are hereby notified that the EPO has not received:

- ☐ a) the notification of election (Rule 61.2 PCT).
- ☐ b) the copy of the international preliminary examination report (Art. 36(3)(a) PCT).
- ☐ c) the copy (copies) of the priority document(s) (Rule 17.2(a) PCT).
- ☒ Copy of Prioritydocument AU 2002 952499 (061102) .....

You are kindly requested to forward the missing item at your earliest convenience to the EPO in its capacity as designated/elected Office.

Receiving Section

Answer of the International Bureau [IB]:

- ☐ The requested item [a), b) or c)] is not available with the IB.  
Reason: .....
- ☐ The applicant has requested the receiving Office to issue a priority document [c)] pursuant to Rule 17.1(b) PCT, but the IB did not receive it.

The International Bureau



Rec'd PCT/PTO 06 MAY 2005 #2  
PC U03/01469  
10/534270

REC'D 01 DEC 2003

WIPO PCT

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Patent Office  
Canberra

I, JANENE PEISKER, TEAM LEADER EXAMINATION SUPPORT AND  
SALES hereby certify that annexed is a true copy of the Provisional specification  
in connection with Application No. 2003904226 for a patent by GEORGE  
STEPHEN RAMSAY as filed on 08 August 2003.



WITNESS my hand this  
Seventeenth day of November 2003

JANENE PEISKER  
TEAM LEADER EXAMINATION  
SUPPORT AND SALES

GEORGE STEPHEN RAMSAY

5

10

**AUSTRALIA**  
**Patents Act 1990**

15

20

PROVISIONAL SPECIFICATION FOR THE INVENTION ENTITLED:

25

30

**“ELECTRICAL SAFETY PLUG AND SOCKET”**

35

The invention is described in the following statement:-

## Technical Field

The present invention relates to an electrical plug and socket that may be used for domestic, industrial or any other use.

5

## Background

In Australia and in many other countries existing two and three pin electrical plugs become alive when partially inserted and such terminals are visually exposed and accessible or vulnerable to contact by foreign objects. There have been proposed a number of prior art devices to make such plugs and sockets safer, however, in most instances such safety devices are usually related to minor modifications or additions to the conventional plug/socket pin arrangements.

10

15

The present invention seeks to provide an electrical plug that does not suffer from the disadvantages of the abovementioned conventional plug/socket arrangements.

## Summary of Invention

20

According to a first aspect the present invention consists in an electrical plug having a body and a prong extending therefrom, said prong having a tip segment at its free end, a base segment at its other end and an intermediate segment therebetween, each segment being insulated from each other, said tip segment and said intermediate segment adapted for carrying current, said plug having wire connecting means extending into said prong, said plug adapted to be inserted into a socket and then subsequently rotated such that at least a portion of said intermediate segment engages with a first current carrying contact member housed within said socket.

25

30

Preferably said tip segment engages with a second current carrying contact member housed within said socket.

In one embodiment said intermediate segment comprising at least two equally spaced apart wings each of which is adapted to carry current and at least one of said wings are adapted to contact said first current carrying contact member.

5

Preferably at least a portion of said tip segment comprising at least two spaced apart wings each of which is adapted to carry current and at least one of said wings are adapted to contact said second current carrying contact member.

10

In another embodiment said intermediate segment has at least three equally spaced apart wings projecting from a central portion thereof, each of said wings is adapted to carry current and at least one of said wings is adapted to contact said first current carrying contact member.

15

Preferably said prong has a base member adapted to be connected to earth.

Preferably said base member engages with an earth contact member that shrouds the aperture of said socket.

20

In one embodiment, the intermediate segment is adapted to carry the active current and said tip segment adapted to carry the neutral current.

In another embodiment, the intermediate segment is adapted to carry the neutral current and said tip segment adapted to carry the active current.

25

In a further embodiment said intermediate segment has three separate current carrying portions, a first portion, a second portion and a third portion, each portion is insulated from each other and the first portion is adapted to engage with said first current carrying contact member.

30

Preferably said socket comprising a clutch mechanism that allows said prong to rotate and disengage from said socket when sufficient force is applied to the plug in a direction substantially opposite to the entry of said prong.

In one embodiment said at least two equally spaced apart wings each have a kinked portion thereon.

5    Brief Description of Drawings

Fig. 1 is an end elevation of a socket for use with a first embodiment of a plug in accordance with the present invention.

10   Fig. 2 is a cross-sectional view of a first embodiment of plug connected to the socket shown in Fig. 1,

Fig. 3 is a section through B-B of the plug and socket shown in Fig. 2,

15   Fig. 4 is an enlarged partial section through C-C of the plug shown in Fig. 2,

Fig. 5 is an elevation of a second embodiment of a plug in accordance with the present invention.

20   Fig. 6 is a cross-sectional view of the second embodiment of plug shown in Fig. 5, connected to a socket.

Fig. 7 is a section through B-B of the plug and socket shown in Fig. 6.

25   Fig. 8 is an end elevation of a socket for use with the present invention.

·    Mode of Carrying out Invention

Figures 1-4 depict the first embodiment of an electrical plug 1 and socket 2.  
30   Plug 1 has a body 3 of insulating material (plastic, rubber, etc.). Extending from an end of body 3 is a prong 4. The prong 4 has a tip segment 5, an intermediate segment 6 and a base segment 7. The intermediate segment 6 and a portion 5a of the tip segment 5 have an elongated "tri-wing" configuration ie. having three equally spaced apart wings 8. The tip segment

5, intermediate segment 6 and base segment 7 are each electrically conductive and insulated from each other. A lead 9 extending from body 3 carries an active wire 10, neutral wire 11 and an earth wire 12, all of which extend through the core of prong 4. Active wire 10 is electrically connected to intermediate segment 6, neutral wire 11 is electrically connected to tip segment 5, and earth wire 12 is electrically connected to base segment 7.

As shown in Figure 2, socket 2 has a tri-wing shaped aperture adapted to receive prong 4 of plug 1. The socket 2 has a seal ring 21 as shown in Fig. 1, for affecting a dust and moisture seal when plug 1 is inserted thereinto.

In use, prong 4 is inserted into aperture 13 within socket 2, and tip 22 of tip segment 5 sits in cavity 23 of end abutment 24. Prong 4, is orientated at entry as shown by the dotted lines 17 in Fig. 3. Upon a 60° rotation of prong 4 (see arrow R) the portion 5a of tip segment 5 which has a tri-wing configuration, engages with the neutral current carrying contact member 14, and the intermediate segment 6 which is electrically connected to active wire 10 engages with the active current contact member 15. Earth wire 12 which is connected to base segment 7 connects with the earth contact member 16 which is mounted about the periphery of socket aperture 13. As a result of the "neck like" portion of base segment 7 extending from body 3, the plug 1, can only be rotated to achieve electrical connection when plug 1 has been fully or near fully inserted into socket 2.

Fig. 4 depicts an enlarged section of the core 25 of prong 4, and cavities therein 27, 28, 29 and 30 being independently insulated, through which the wires 10, 11 and 12 may extend.

Figures 5-7 show a second embodiment of an electrical plug 101 and socket 102. In a similar manner to plug 1 of the first embodiment, plug 101 has a body 103 of insulating material. Extending from an end of body 103 is a prong 104. The prong 104 has a tip segment 105, and intermediate segment 106 and a base segment 107. In a similar fashion to the first embodiment, the intermediate segment 106 and a portion 105a of tip segment 105 have an

elongated tri-wing configuration ie. having three equally spaced apart wings 108. The tip segment 105, intermediate segment 106 and base segment 107 are each electrically conductive and insulated from each other. A lead 109 extending from body 103 carries an active wire 110, neutral 111 and an earth wire 112 all of which extend through the core of prong 104. Active wire 110 is electrically connected to intermediate segment 106, neutral wire 111 is electrically connected to tip segment 105, and earth wire 112 is electrically connected to base segment 107.

The main difference between this second embodiment of electrical plug 101 and that of the first embodiment depicting plug 1, is that in this embodiment the intermediate segment 106 has three separate axially spaced apart portions 106a, 106b and 106c, which are electrically insulated from each other.

In use prong 104 is inserted into the aperture of socket 102 and tip 122 at the free end of tip segment 105 seats in the cavity 123 of end abutment 124. Prong 104 is oriented at entry as shown by the dotted lines 117 in Figure 7. Upon a 60° rotation of prong 104, the portion 105a of tip segment 105 having a tri-wing configuration engages with the neutral current carrying contact member 114, and the intermediate segment 106 which is electrically connected to active wire 110 engages with the active current contact 115 within socket 102. The earth wire 112 which is connected to base segment 107 connects with the earth contact member 116 which is mounted about the periphery of the aperture of socket 102. As a result of the "neck like" portion of base segment 107 extending from body 103, the plug 101, can only be rotated to achieve electrical connection when plug 101 has been fully or near fully inserted into socket 102.

The three intermediate segment portions 106a, 106b and 106c could be used for a three-phase power supply, with each portion able to carry one of the phases. Alternatively, a plug and socket arrangement of this second embodiment could be used in a single phase supply where the segment 106a carries the active supply, whilst portions 106b and 106c could be used as a



switching arrangement for use in safety switching and the like and could for example be used on the power tool and safety trigger described in the applicant's co-pending Australian provisional patent application no. PS0019 entitled "Improvement to power tools and trigger handles thereof" filed 18  
5 January 2002.

In the sectional view of Fig 6, the socket 102 of the second embodiment also has a clutch-release mechanism 118 that allows prong 104 and therefore plug 101 to rotate and disengage from socket 102, when sufficient force is applied  
10 to plug 101 in a direction substantially opposite to the entry of prong 104. Clutch-release mechanism 118 comprises a drive plate 119 and pressure plate 120. The drive plate 119 is journaled to the prong 104 for rotation therewith. When prong 104 is operably connected to socket 102, drive plate 119 it is held in place in "detent engagement" by a pressure plate 120 against  
15 a spring (not shown) on drive plate 119 acting about the longitudinal axis L of prong 104. If sufficient force is applied to the body 103 of plug 101 in a direction substantially opposite to the entry of the prong 104, the pressure plate 120 will disengage from drive plate 119, thereby allowing drive plate 119 to rotate through 60° as a result of the spring force. As drive plate 119 rotates  
20 so does prong 104, thereby disengaging it from the socket contact members 114,115 and allows prong 104 to be withdrawn from the socket 102.

Advantages of the above mentioned embodiments are as follows. Firstly, as the prongs 4 and 104 have a tri-wing configuration and their electrical contacts  
25 are spaced apart as segments 5,6,7 and 105,106,107, the prong 4 or 104 can be inserted into its respective socket 2 or 102 in any one of three orientations, rather than having to axially align the pins of a conventional plug to its correct single entry orientation, thereby making the present embodiments easier to insert.

30 Secondly, the plug 1 or 101 may then be rotated either clockwise or anti-clockwise to make the electrical connection. Plugs 1 and 101 do not electrically connect within respective sockets 2 and 102, until they are fully inserted and concealed prior to rotation, thereby incorporating another level of

safety, whether the socket forms the female end of a power lead or a part of a general-purpose power outlet. In a configuration where socket 2 or 102 forms part of a general-purpose power outlet, it may be used without a power switch, as the electrical connection does not take place without rotation of the plug relative to the socket. Notwithstanding this, a separate power switch may be used for additional safety.

Thirdly, as socket 2 or 102 have their earth contact member 16 and 116 respectively mounted about the periphery of socket apertures 13 and 113 thereby protecting the entry point, it would be difficult for a child to receive an electric shock or possible electrocution by placing foreign objects into socket 2 or 102.

Fourthly, the plug and sockets of the abovementioned embodiments do not readily come apart as with conventional plugs as they must be rotated prior to withdrawal. In the second embodiment where a clutch release mechanism is fitted as shown in Fig. 6, the plug and socket has an emergency tension release function.

Fifthly, whilst the first embodiment of the present invention may be used with a single-phase supply, the second embodiment of the present invention may be used for two-phase or three-phase supply or safety switching of electrical devices.

Sixthly, the plug and socket is provide with a seal for preventing ingress of moisture and dust, when the plug is fitted to the socket.

It should be understood that in other not shown embodiments, the plug and socket arrangement may be used for application where no earth is required.

It should also be noted that whilst the abovementioned first embodiment depicts the active wire 10 electrically connected to intermediate segment 6, and neutral wire 11 is electrically connected to tip segment 5, they could be swapped around such that the neutral wire is connected to intermediate segment 6 and the active wire to tip segment 5.

It should also be understood that in another not shown variation of the abovementioned embodiments the tip segment 5,105 may make its current contact through its tip 22,122 engaging a current contact member at end abutment 24,124 rather than with contact member 14 or 114.

Fig. 8 depicts a third embodiment of a socket 202 for use with a third embodiment of an electrical plug and socket in accordance with the present invention. Like that of the first and second embodiments the socket 202 and the prong of the plug (not shown) would have a "tri-wing" configuration. However, each spaced-apart wing 208 of the socket 202 has a kinked portion 250. Each wing of the plug prong (not shown), would also have a kinked portion such that it may be received by socket 202. The kinked portion 250 of each wing 208 of socket 202, would make it difficult for children or others to insert a metallic object into socket 202, and make contact with a live terminal.

In another not shown embodiment the tri-wing configuration of the prong could be replaced by a bi-wing configuration, having two wings least two equally spaced apart wings, however the prong having similar spaced apart segments 5,6,7 or 105,106,107 as in the abovementioned embodiments. In such an embodiment, the plug would require insertion into a complementary socket prior to its rotation for electrical connection. In other not shown embodiments the prong may have four, five or more wings.

In further not shown embodiments the plug and socket profiles may differ from those shown in the above mentioned embodiments without departing from the scope of the present invention.

#### Aspects of invention

Some aspects of the invention are described in the following paragraphs:

1. An electrical plug having a body and a prong extending therefrom, said prong having a tip segment at its free end, a base segment at its other

end and an intermediate segment therebetween, each segment being insulated from each other, said tip segment and said intermediate segment adapted for carrying current, said plug having wire connecting means extending into said prong, said plug adapted to be inserted into a socket and then subsequently rotated such that at least a portion of said intermediate segment engages with a first current carrying contact member housed within said socket.

2. An electrical plug as defined in paragraph 1, wherein said tip segment engages with a second current carrying contact member housed within said socket.

3. An electrical plug as defined in paragraphs 1 or 2, wherein said intermediate segment comprising at least two equally spaced apart wings each of which is adapted to carry current and at least one of said wings are adapted to contact said first current carrying contact member.

4. An electrical plug as defined in paragraph 3, wherein at least a portion of said tip member comprising at least two spaced apart wings each of which is adapted to carry current and at least one of said wings are adapted to contact said second current carrying contact member.

5. An electrical plug as defined in paragraph 1 or 2, wherein said intermediate segment has at least three equally spaced apart wings projecting from a central portion thereof, each of said wings is adapted to carry current at least one of said wings is adapted to contact said first current carrying contact member.

6. An electrical plug as defined in paragraph 5, wherein at least a portion of said tip member comprising at least three spaced apart wings each of which is adapted to carry current and at least one of said wings are adapted to contact said second current carrying contact member.

7. An electrical plug as defined in paragraphs 3 or 5, wherein the aperture of said socket is complementary shaped to receive said prong.

5 8. An electrical plug as defined in any one of the preceding paragraphs, wherein said prong has a base member adapted to be connected to earth.

10 9. An electrical plug as defined in paragraph 7, wherein said base member engages with an earth contact member that shrouds the aperture of said socket.

15 10. An electrical plug as defined in paragraph 1, wherein said intermediate segment is adapted to carry the active current and said tip segment adapted to carry the neutral current.

11. An electrical plug as defined in paragraph 1, wherein intermediate segment is adapted to carry the neutral current and said tip segment adapted to carry the active current.

20 12. An electrical plug as defined in paragraph 5, wherein said intermediate segment has three separate current carrying portions, a first portion, a second portion and a third portion, each portion is insulated from each other and the first portion is adapted to engage with said first current carrying contact member.

25 13. An electrical plug as defined in any one of the preceding claims, wherein said socket comprises a clutch-release mechanism that allows said prong to rotate and disengage from said socket when sufficient force is applied to the plug in a direction substantially opposite to the  
30 entry of said prong.

14. An electrical plug as defined in paragraph 3 wherein said at least two  
equally spaced apart wings each have a kinked portion thereon.

5 Dated this 7<sup>th</sup> day of August 2003.

GEORGE STEPHEN RAMSAY

BY:

10

HODGKINSON AND McINNES

Patent Attorneys for the Applicant

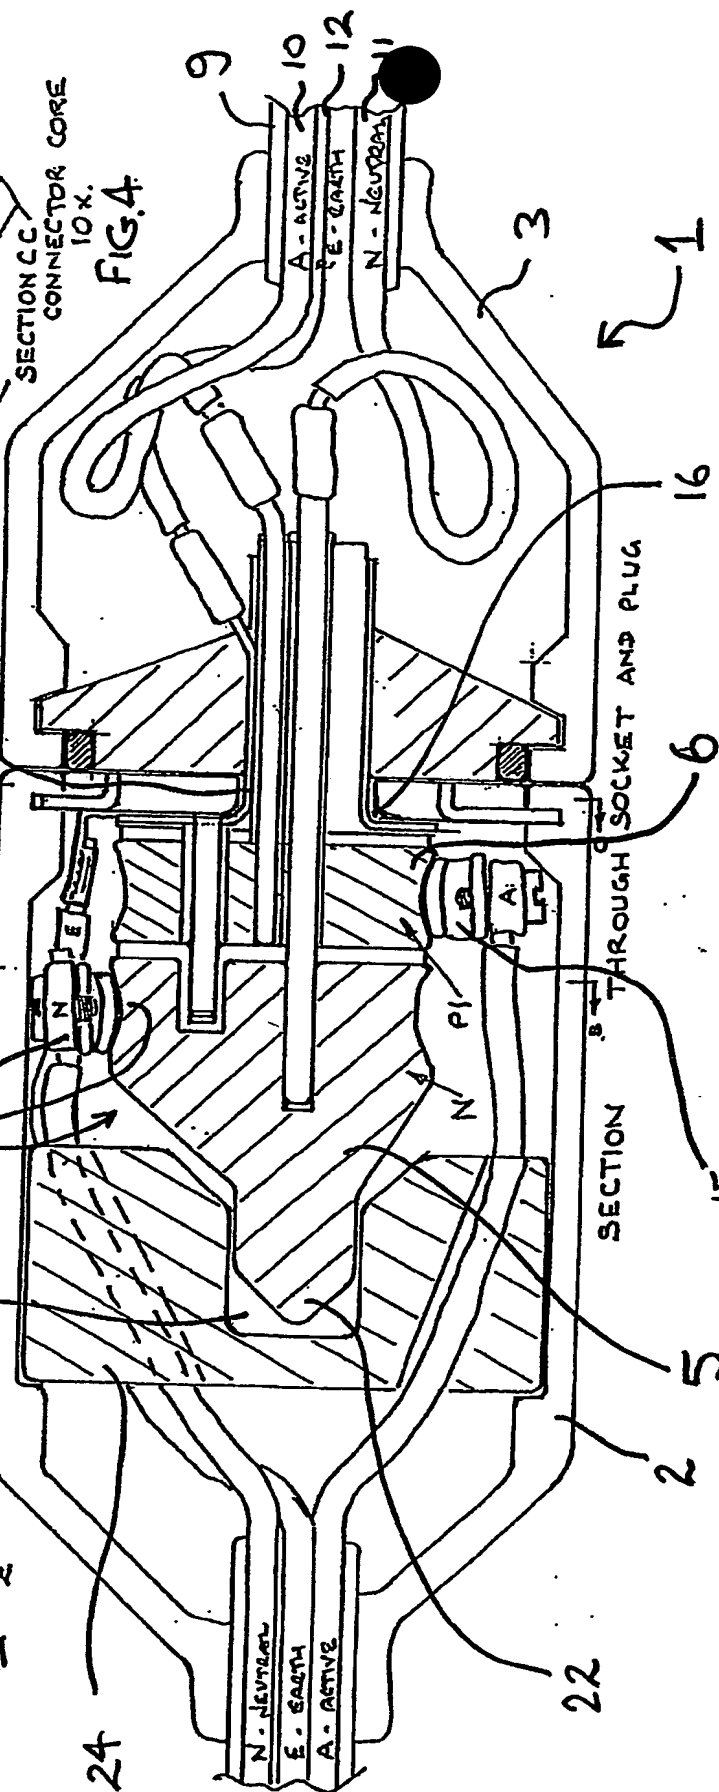
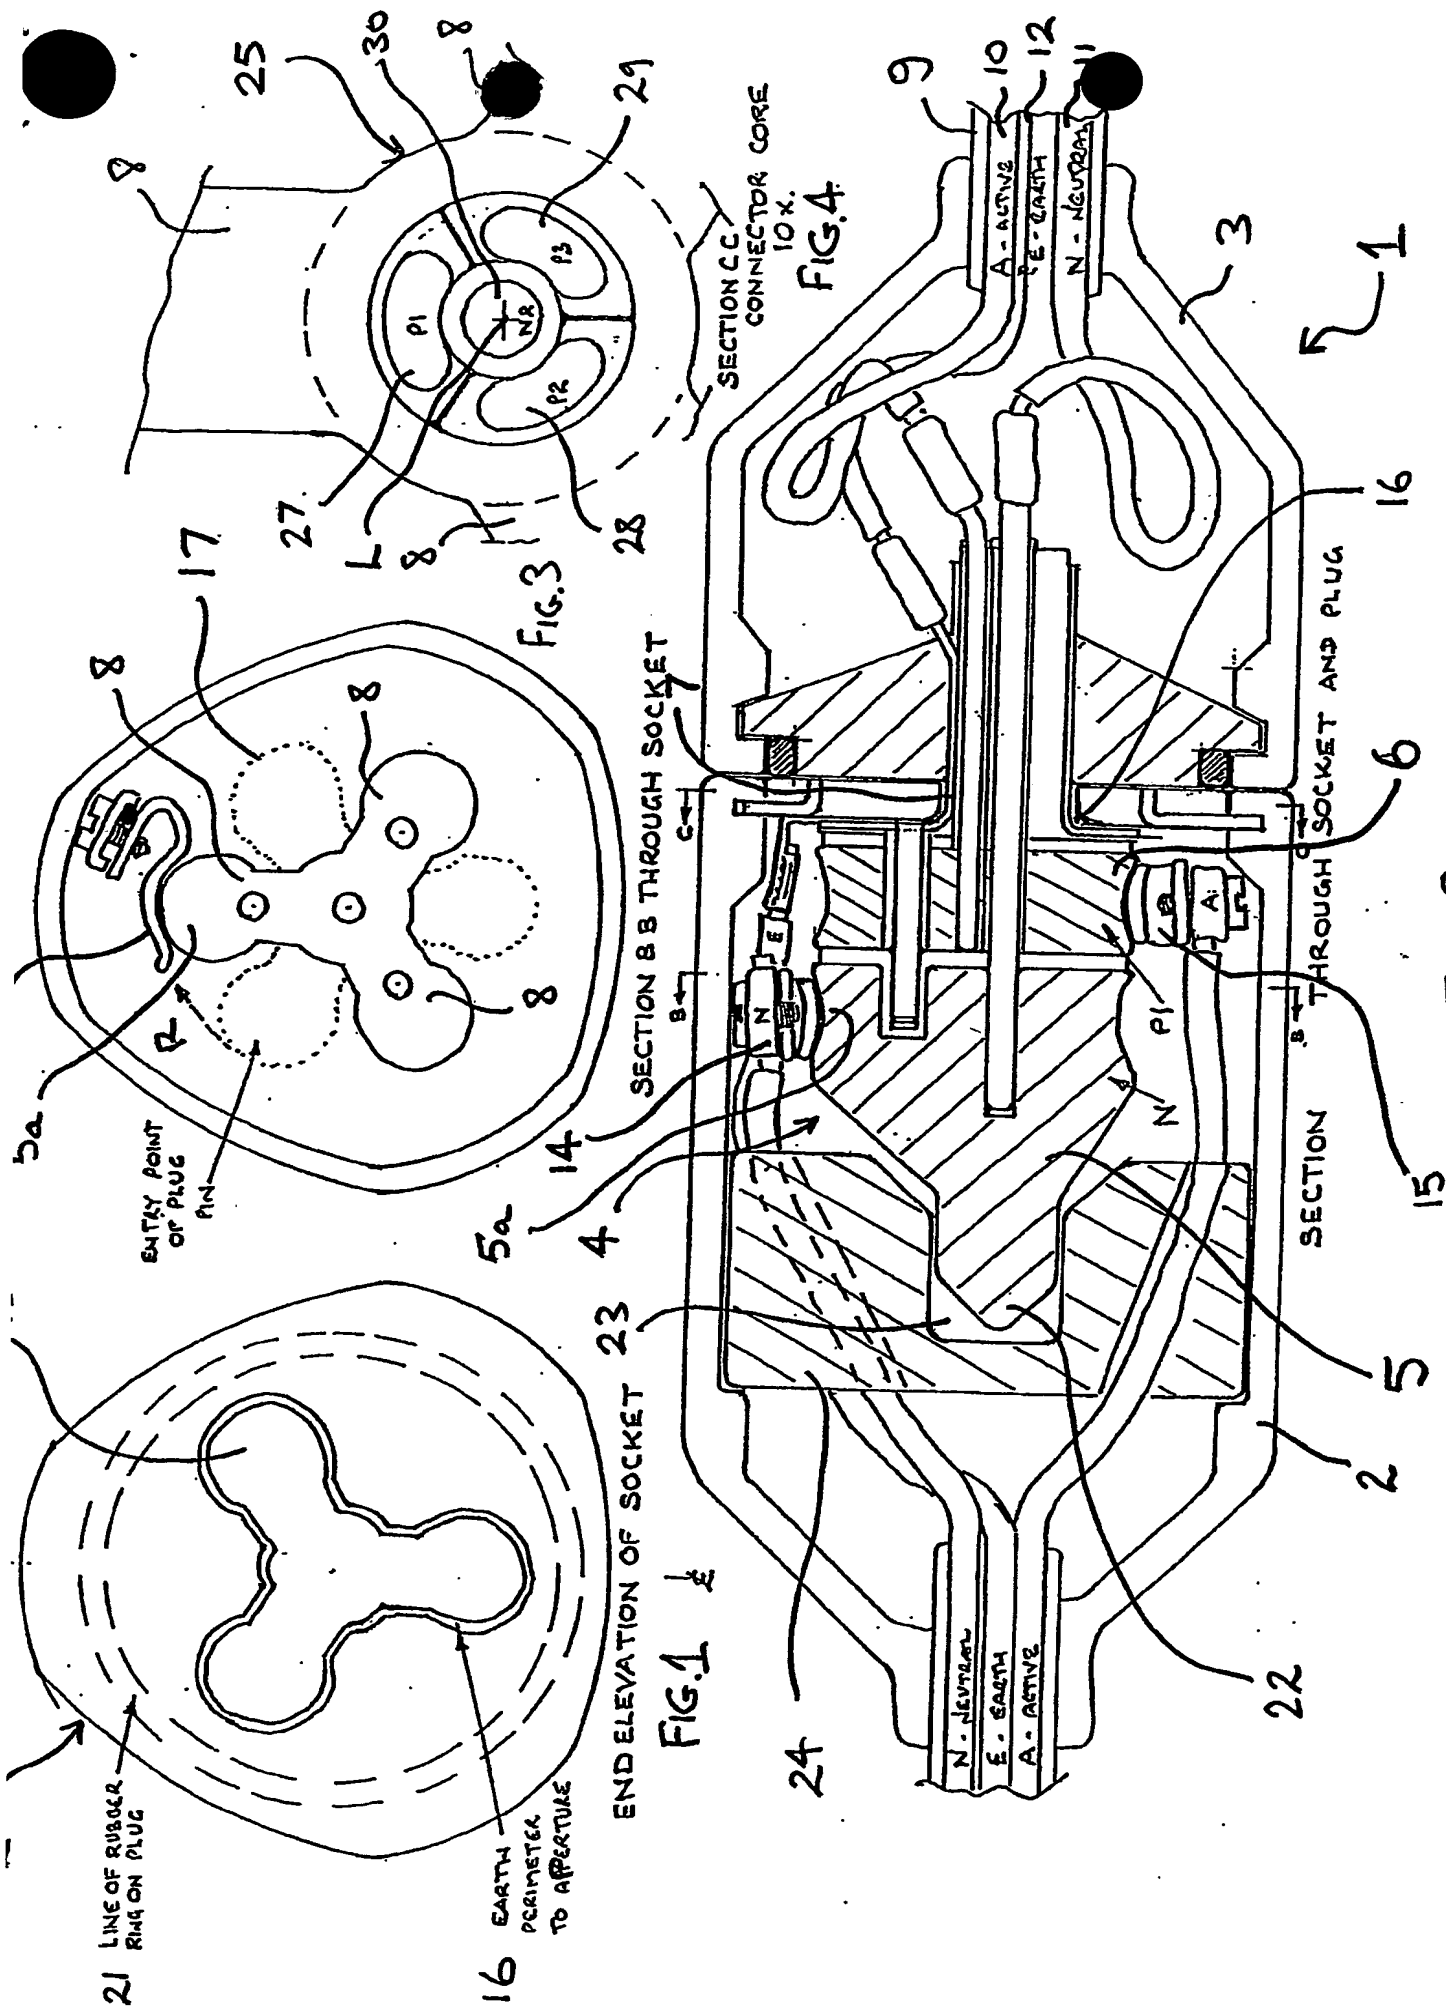
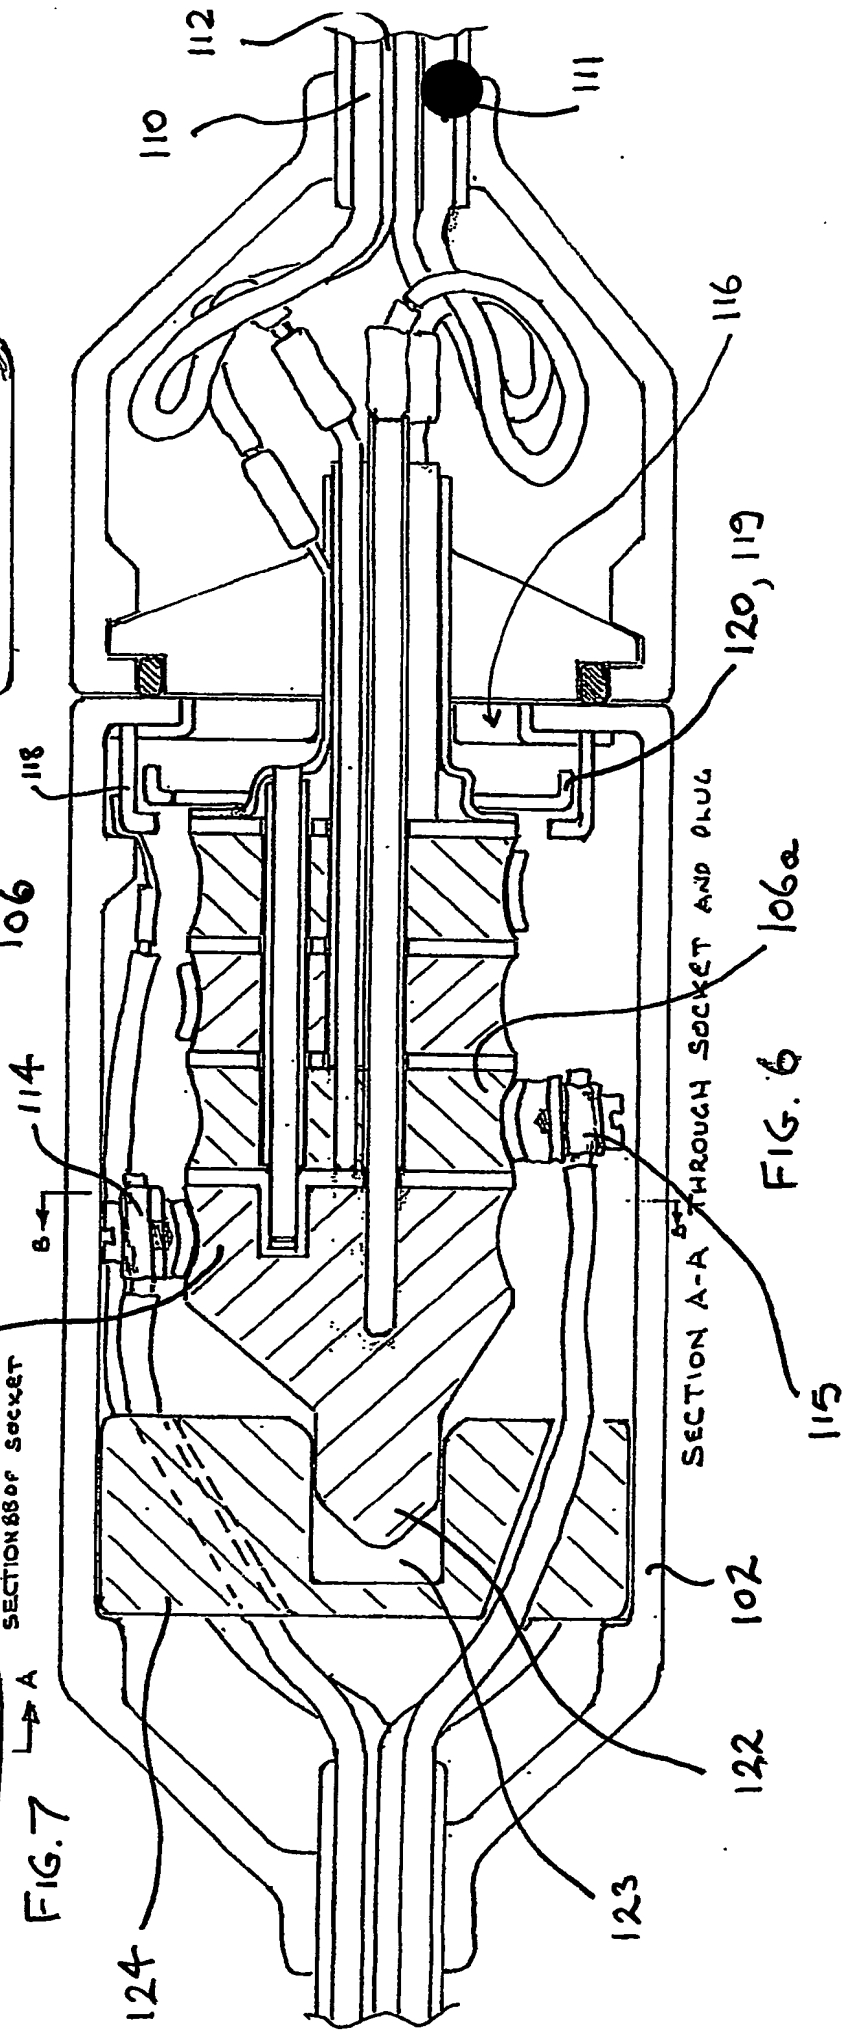
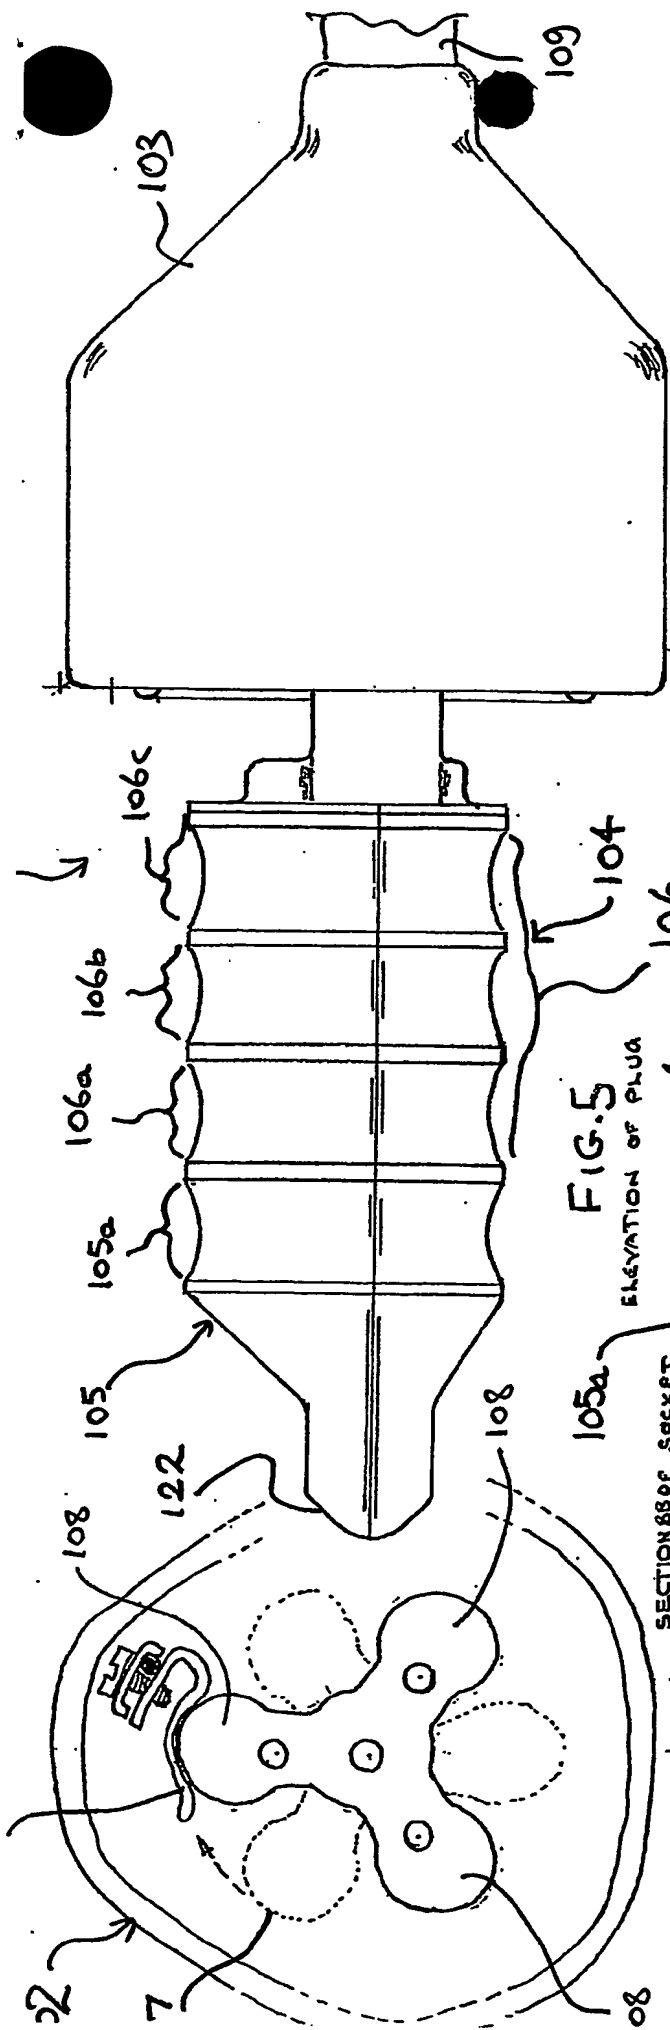


Fig. 2





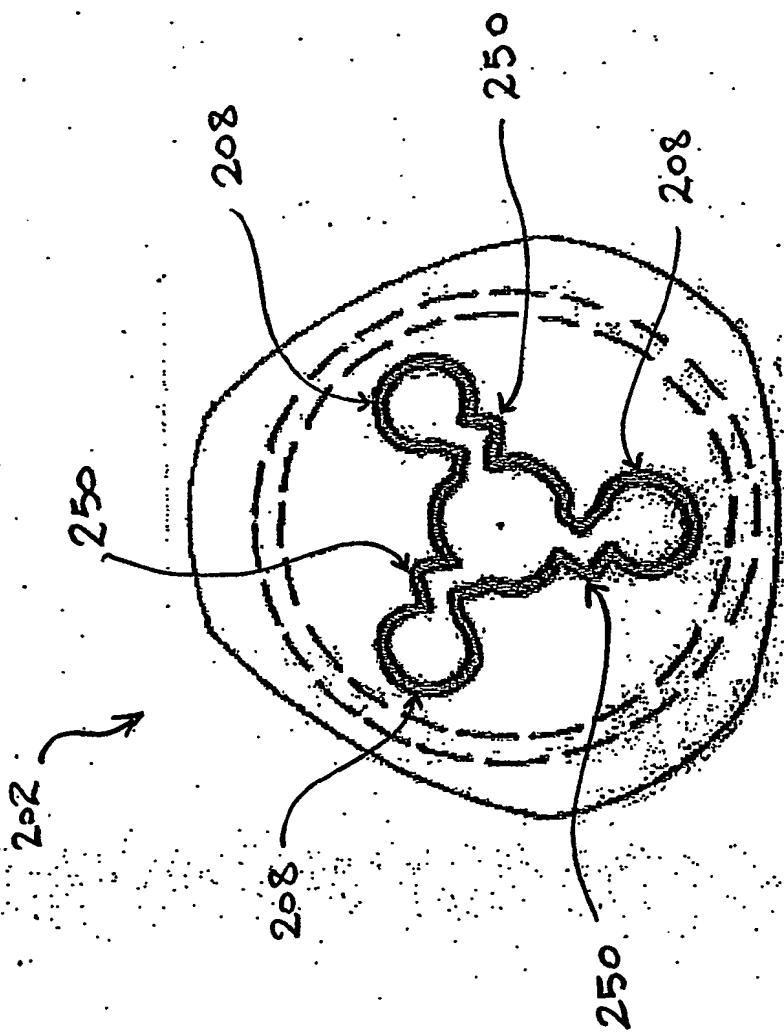


FIG. 8

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**